


Shakti Pulley

Resilient Couplings



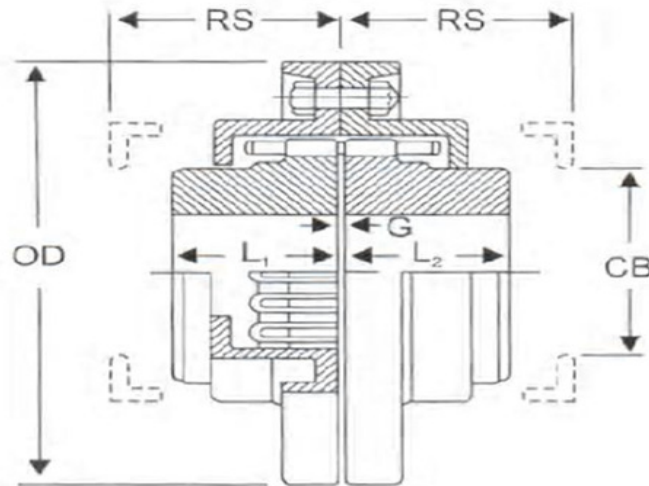

Resilient - Standard Couplings - Type Z (Vertical Split Cover) & X (Axial Split Cover)

Coupling Sizes	Kw at per 100 rpm	Max. Speed		Bore Capacity		Clear Dia. (OD)		Boss Length (L1/L2)	Cover Bore CB (mm)	Removal Space RS (mm)	Gap G (mm)	Weight (Kg)	
		Z	X	Pilot	Max.	Z	X					Z	X
SRC - 101	0.45	5800	3600	10	29	105	104	38	43	53	0.80	3	3
SRC - 102	0.70	5000	3350	12	38	120	120	38	55	53	0.80	4	4
SRC - 103	1.50	4500	3350	16	42	144	127	44.5	60	60	0.80	5	5
SRC - 104	2.20	3500	2600	16	58	172	159	51	85	60	0.80	9	9
SRC - 106	3.40	3300	2400	16	58	190	178	51	84	80	0.80	11	11
SRC - 107	4.90	3100	2200	16	65	197	190	57	95	80	0.80	16	16
SRC - 108	7.00	2600	1900	25	80	222	222	63.5	115	80	0.80	20	20
SRC - 109	9.40	2300	1700	25	95	254	245	70	140	81	0.80	27	27
SRC - 110	13.80	2000	1600	25	110	276	267	89	160	81	1.60	43	43
SRC - 111	26.50	1900	1500	38	104	295	324	102.0	153	129	1.60	54	54
SRC - 113	33.90	1800	1300	50	124	324	336	101.5	185	148	1.60	63	63
SRC - 114	48.90	1600	1300	50	124	336	381	101.5	180	148	1.60	72	72
SRC - 115	67.50	1400	1100	50	148	375	381	114.0	220	148	1.60	104	104
SRC - 117	93.60	1200	1000	50	170	425	425	127.0	250	148	1.60	149	149
SRC - 120	179.00	1200	800	75	157	432	501	140.0	236	180	3.20	180	180
SRC - 122	261.00	1100	700	85	173	492	552	152.5	260	180	3.20	216	216
SRC - 125	385.00	1200	***	110	185	686	***	178.0	285.7	***	3.20	446	446
SRC - 126	524.00	1050	***	135	210	781	***	203.0	324	***	3.20	578	578
SRC - 127	732.00	900	***	145	242	876	***	228.0	368	***	6.35	910	910
SRC - 128	1215.00	800	***	155	265	1015	***	228.0	406	***	6.35	1605	1605

SHAKTI PULLEY MFG. COMPANY

AN ISO 9001 COMPANY

28/3, Street No. 6, Anand Parbat Industrial Area, New Rohtak Road, New DELHI-110005.

Unit-2

Plot No.50, Sector-16, HSIDC, Bahadurgarh, Haryana

Mobile: - 8010658403-06 & 981005908 Email: mail@shaktipulley.com ; shakti@bol.net.in

Website: - www.shaktipulley.com